

Electrical Parts




WB Series - Standard Coil Bi-Frequency and UL approved - F Class - IP65

Coil manufactured with H class copper wire, moulded in thermoplastic material polyester with 30% glass fiber, IP65 protection rate with DIN 43650B three pin connector.

This coil conforms to the IEC/CENELEC safety standards and complies with European low-voltage directive 73/23/EC.

Voltage tolerances: -10% to +10% of the nominal voltage (AC), -5% to +10% of the nominal voltage (DC).
Duty: Continuous duty coil (100%ED).
Weight: 90 g with plug.

Voltage	Power Consumption	Reference	Approvals	Ambient Temperature	Class of Insulation	Dimensional Drawing
110-120/50-60	4.5W	WB 4.5 110-120/50-60	IMQ	-10°C to +50°C	F Class 155°C	18
220-230/50-60	4.5W	WB 4.5 220-230/50-60	IMQ	-10°C to +50°C	F Class 155°C	18
24/50-60	4.5W	WB 4.5 24/50-60	-	-10°C to +50°C	F Class 155°C	18
240/50-60	4.5W	WB 4.5 240/50-60	-	-10°C to +50°C	F Class 155°C	18
120/60 UR	4.5W	WB 4.5 120/60 UR	UL	-10°C to +50°C	F Class 155°C	18
208-240/60 UR	4.5W	WB 4.5 208-240/60 UR	UL	-10°C to +50°C	F Class 155°C	18
24/60 UR	4.5W	WB 4.5 24/60 UR	UL	-10°C to +50°C	F Class 155°C	18
24DC	5.0W	WB 5.0 24DC	-	-10°C to +50°C	F Class 155°C	18

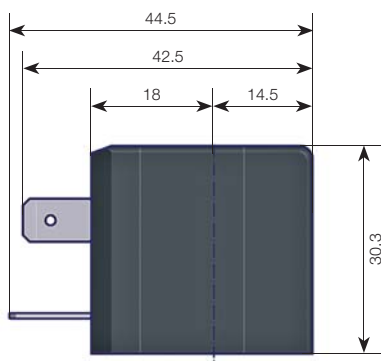

All dimensions are in mm

Dimensional Drawing N° 18