



SCQ flow meter

Dimensioned drawings


SCAQ-060

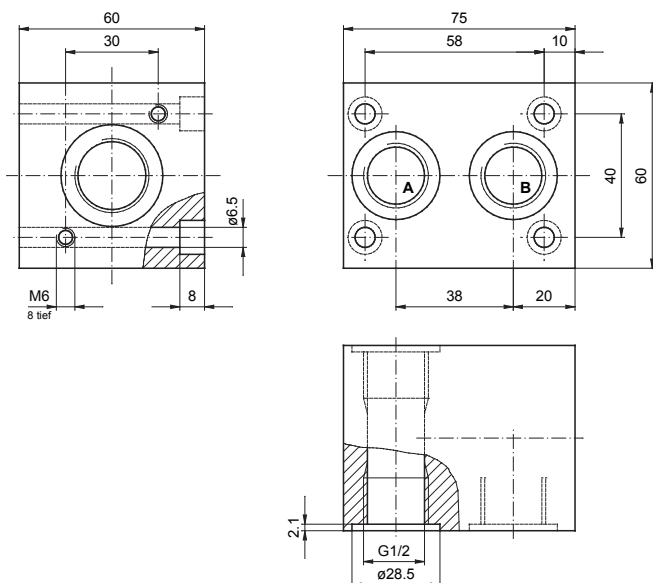

SCAQ-GI-R1/2



SCAQ-150

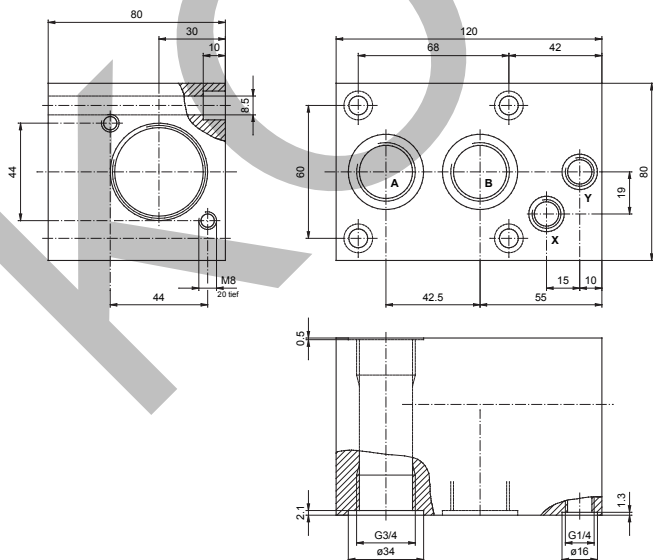

Order code

SCQ-060 (-60 to +60 l/min)

SCQ-060-10-07

M12x1, 4-pole; connecting plug; IP67

0 to 20 mA; -60 to +60 l/min (including spacer ring)

Accessories SCQ-060

IN-LINE adapter

G1/2 BSPP inner (A-B) and M24 inner

With screw plug:

M24 outer (SCQ-M24X1,5-ED)

Connector block

G1/2 BSPP inner (A-B) and M24 inner

With screw plug:

M24 outer (SCQ-M24X1,5-ED)

G1/2 BSPP outer (A-B) (SCQ-R1/2-ED)

SCQ-150 (-150 to +150 l/min)

SCQ-150-10-07

M12x1, 4-pole; connecting plug; IP67

0 to 20 mA; -150 to +150 l/min

Accessories SCQ-150

Connector block

G3/4 BSPP inner (A-B) and M24 inner

With screw plug:

M42 outer (SCQ-M42X1,5-ED)

G3/4 BSPP outer (A-B) (SCQ-R3/4-ED)

Spare parts

Spacer ring for SCQ-060

Seal kit for SCQ-060

Seal kit for SCQ-150

SCAQ-060

SCAQ-150

SC-910

SC-911

SC-912

Connection cable and single plug

Connection cable, assembled

(open cable end)

SCK-400-xx-xx

Cable length (m)

2 m	02
5 m	05
10 m	10

Plug

M12 cable jack; straight	45
M12 cable jack; 90° angled	55

Single connector

M12 cable jack; straight

M12 cable jack; 90° angled

SCK-145

SCK-155