


T-Verschraubung reduziert

Té réduit

Tee reduction union

SO 6139

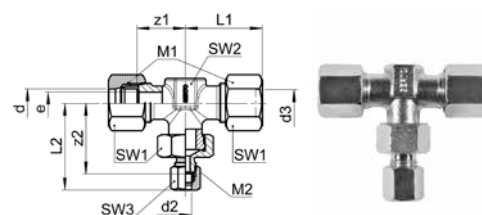


Type -d -d2 -d3	Mat.-Nr.	bar	M1	M2	SW1	SW2	SW3	L1	L2	z1	z2	e	kg/100
SO 6139-12-8-12	218.3009.210	250	18x1.5	14x1.5	22	17	17	37.0	48.0	25.0	40.0	6.2	19.200
SO 6139-14-8-14	218.3009.320	250	22x1.5	14x1.5	27	19	17	42.0	52.0	29.0	44.0	6.2	32.800
SO 6139-14-10-14	218.3009.334	250	22x1.5	16x1.5	27	19	19	42.0	55.0	29.0	45.0	8.2	34.000
SO 6139-15-8-15	218.3009.393	200	22x1.5	14x1.5	27	19	17	42.0	52.0	29.0	44.0	6.2	32.800
SO 6139-15-10-15	218.3009.410	200	22x1.5	16x1.5	27	19	19	42.0	55.0	29.0	45.0	8.2	34.000
SO 6139-18-8-18	218.3009.568	200	26x1.5	14x1.5	32	24	17	48.0	55.0	32.0	47.0	6.2	48.200
SO 6139-18-15-18	218.3009.628	200	26x1.5	22x1.5	32	24	27	48.0	62.0	32.0	49.0	12.5	53.500

Gerade Verschraubung

Union double

Straight union

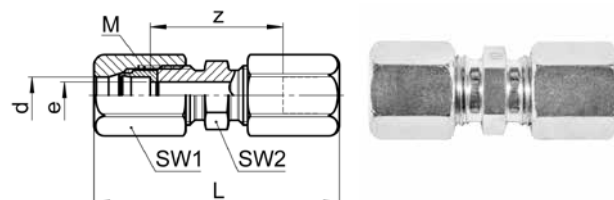

SO 6240

Type -d	Mat.-Nr.	bar	M	SW1	SW2	L	z	e	kg/100
SO 6240-6	218.1020.060	400	12x1.5	14	12	42.0	26.0	5.0	3.600
SO 6240-8	218.1020.080	300	14x1.5	17	14	43.0	27.0	6.2	5.300
SO 6240-10	218.1020.100	250	16x1.5	19	17	49.0	29.0	8.2	8.100
SO 6240-12	218.1020.120	250	18x1.5	22	19	54.0	30.0	10.2	11.200
SO 6240-14	218.1020.140	250	22x1.5	27	24	58.0	32.0	12.5	18.800
SO 6240-15	218.1020.150	200	22x1.5	27	24	58.0	32.0	12.5	18.800
SO 6240-16	218.1020.160	200	24x1.5	30	24	63.0	33.0	14.0	25.300
SO 6240-18	218.1020.180	200	26x1.5	32	27	65.0	33.0	16.0	27.800
SO 6240-20	218.1020.200	200	26x1.5	32	27	68.0	34.0	16.0	28.500
SO 6240-22	218.1020.220	160	30x2.0	36	32	67.0	39.0	19.0	36.200
SO 6240-25	218.1020.250	160	33x2.0	41	36	78.0	44.0	22.0	55.800
SO 6240-28	218.1020.280	160	36x2.0	41	41	72.0	40.0	25.0	44.300
SO 6240-30	218.1020.300	160	39x2.0	46	41	85.0	49.0	27.0	71.000